

MERICRUSHER

MJHS-241 DTX

For versatile crushing



MERICRUSHER

MERICRUSHER

MJHS-241 DTX

For versatile crushing

MERICRUSHER WORKING ENVIRONMENTS

FOREST

- Crushing of harvesting leftovers
- Preparing of hauling lines
- Soil preparing for planting
- Maintenance of forest roads
- Clearing of vegetation and undergrowth

AGRICULTURE

- Clearing of new farm land (forest to farm clearing)
- Reclaiming soil for farming
- Orchard clearing
- Farm road maintenance

EQUIPMENT

FEATURES

- Bolt mounted counter blades
- Hardox liner (frame) bolt mounted
- UNT or UNTH Rotor with cost effective carbide cutters
- POC - Pressure operated safety clutch (SUOKONE patented)
- Possibility to turn the direction of the rotor
- Bolt mounted lift arm brackets

CONSTRUCTION

- Clearing of building sites
- Crushing of stumps
- Clearing of power lines
- Right of way clearing
- Clearing of firebreaks

OPTIONS

- Slip alarm (12V)
- Sizing screen roating (hydraulic front/rear)
- Sizing screen door type (hydraulic front/rear)
- Rear roller (hydraulic)
- Guide plate (hydraulic front/rear)
- Hydraulic Top Link
- Multiple cutter options available

Base machine demand


Tractor	
Mounting	CAT-3
Auxiliary hydraulic	3 pcs. double acting
PTO	1000 rpm
Working speed	Creeper gear recommended

Technical data:

Power range	400 - 700 hp
Transmission	Mechanical PTO
Final transmission	Gear (X-serie)
Clutch	POC-3 XL
Rotor diameter / width	600 / 2410mm 24 / 95 inch
Cutter qty. base + sides	98 +12 (UNTH Rotor)
Working depth	300 mm / 12 inch

Main dimensions:

Length	2540 mm	100 inch
Width	2990 mm	117 inch
Height	1430 mm	57 inch
Weight	2950 kg	6500 lbs
Weight, with options	4000 kg	8820 lbs

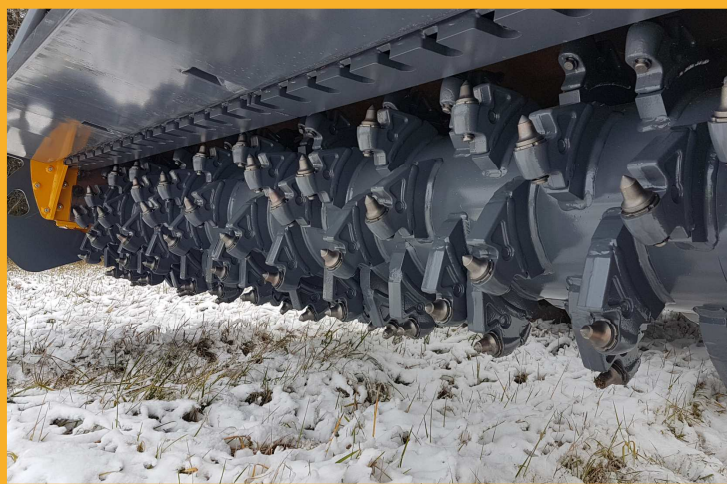

SUOKONE OY
88610 Vuokatti
FINLAND

tel. +358 86 66 2011
suokone@suokone.com
www.mericrusher.com